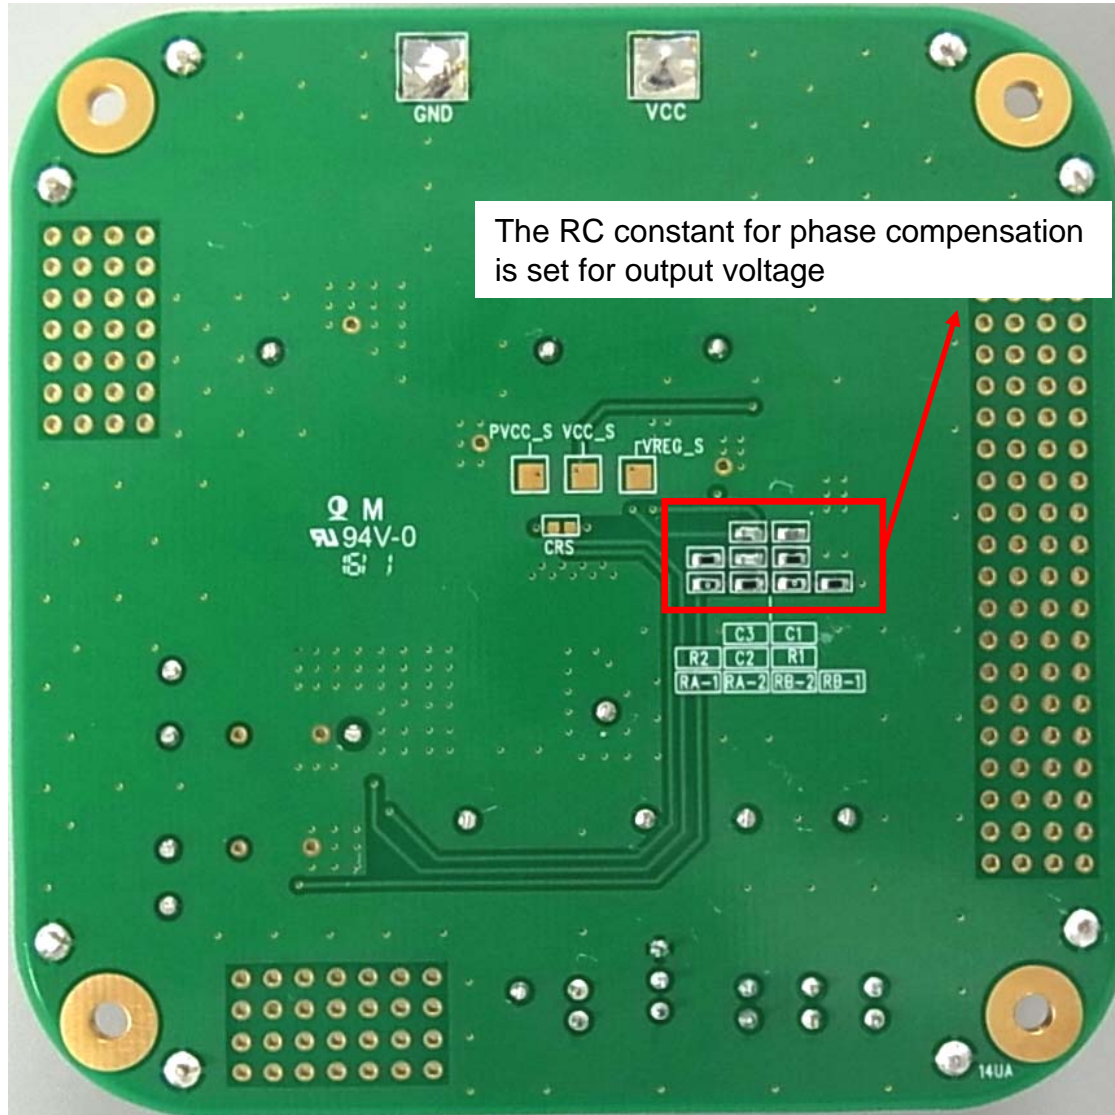

AN33014UA

Evaluation Board Manual

Panasonic Corporation
Automotive & Industrial Systems Company
Semiconductor Business Division

AN33014UA Evaluation board (back side)

This is a two layer circuit board. The back side is shown below. (The front side is shown on the previous page.)



AN33014UA Evaluation board (components)

The BOM of this board is shown below.

Table 1 : component on the evaluation board (reference)

Board Component Name	Part Name	Size	Value	Maker	Description
CBT	GCM188R11C104KA01J	JIS1608_[EIA0603]	0.1 μ F	Murata	Bootstrap Capacitor
C-CT	GCM188R11C104KA01J	JIS1608_[EIA0603]	0.1 μ F	Murata	LPF for PLL
C-SS	GCM188R11C104KA01J	JIS1608_[EIA0603]	0.1 μ F	Murata	Soft Start setting
C-TL	GCM188R11C104KA01J	JIS1608_[EIA0603]	0.1 μ F	Murata	Timer Latch setting
C1	GCM1882C1H222JA01J	JIS1608_[EIA0603]	2.2nF	Murata	Compensation Capacitor
C2	GCM1882C1H471JA01J	JIS1608_[EIA0603]	470pF	Murata	Compensation Capacitor
C3	GCM1882C1H270JA01J	JIS1608_[EIA0603]	27pF	Murata	Compensation Capacitor
CVREG	GCM188R71C105KA49J	JIS1608_[EIA0603]	1 μ F	Murata	VREG Capacitor
CVCC3, CVCC4, CVCC5	CKG57NX7R1H226MT	JIS5750[EIA2220]	22 μ F	TDK	Input Capacitor
C-VOUT1	TMK325C7226MM-T	JIS322_[EIA1210]	22 μ F	TAIYO,YUDE N	Output Capacitor
C-VOUT2	GCM188R11C104KA01J	JIS1608_[EIA0603]	0.1 μ F	Murata	Output Capacitor
L1	CDRH8D43-100NC	8.3(L) x 8.3(W)	10 μ H	SUMIDA	Inductor
D1	DB24416	3.8(L) x 2.4(W)	-	Panasonic	Schottky Diode
R1	ERA3AEB752V	JIS1608_[EIA0603]	R=7.5k	Panasonic	Compensation & Feedback Resistor
R2	ERA3AEB152V	JIS1608_[EIA0603]	R=1.5k	Panasonic	Compensation & Feedback Resistor
RA-1	ERA3AEB303V	JIS1608_[EIA0603]	R=30k	Panasonic	Compensation & Feedback Resistor
RB-1	ERA3AEB752V	JIS1608_[EIA0603]	R=7.5k	Panasonic	Compensation & Feedback Resistor
RA-2,RB-2	ERJ3GEY0R00V	JIS1608_[EIA0603]	R=0	Panasonic	for Evaluation
R-RADJ	ERA3AEB303V	JIS1608_[EIA0603]	R=30k	Panasonic	Current Feedback Adjustment Resistor
RFLAG	ERA3AEB204V	JIS1608_[EIA0603]	R=200k	Panasonic	Pull-up Resistor
R-RT1	ERA3AEB223V	JIS1608_[EIA0603]	R=22k	Panasonic	OSC Setting Resistor (Fsw = 2000kHz at selecting JP3)
R-RT2	ERA3AEB134V	JIS1608_[EIA0603]	R=130k	Panasonic	OSC Setting Resistor (Fsw = 490kHz at selecting JP4)
R-RT3	ERA3AEB393V	JIS1608_[EIA0603]	R=39k	Panasonic	OSC Setting Resistor (Fsw = 1370kHz at selecting JP5)
RSENSE	ERJ6BWFR050V	JIS2012_[EIA0805]	R=50m	Panasonic	Output Current Sense Resistor
R7,R8,R9,RBTVCC	ERJ3GEY0R00V	JIS1608_[EIA0603]	R=0	Panasonic	for Evaluation
CS1	GCM1882C1H332JA01J	JIS1608_[EIA0603]	3300pF	Murata	Snubber Circuit
RS1	ERA3AEB221V	JIS1608_[EIA0603]	R=220	Panasonic	Snubber Circuit
RS2	MPZ1608S300A	JIS1608_[EIA0603]	30 ohm at 100MHz	TDK	Ferrite Beads for EMI filter

Note: The specifications of the BOM are reference values. Other components might be mounted depending on target values of output voltage, frequency, etc.

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information de-scribed in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book.
Please consult with our sales staff in advance for information on the following applications, moreover please exchange documents separately on terms of use etc.: Special applications (such as for in-vehicle equipment, airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, medical equipment and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
Unless exchanging documents on terms of use etc. in advance, it is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. We do not guarantee quality for disassembled products or the product re-mounted after removing from the mounting board.
When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) When reselling products described in this book to other companies without our permission and receiving any claim of request from the resale destination, please understand that customers will bear the burden.
- (8) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.