


Extended length is with 500g of force

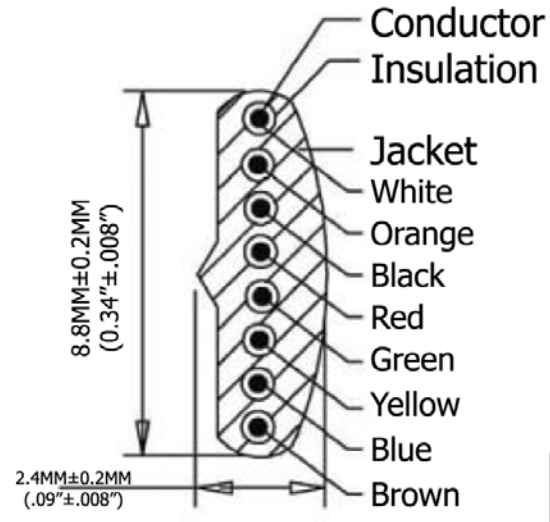

P1	P2
1	8
2	7
3	6
4	5
5	4
6	3
7	2
8	1

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	39.5 Inches
2,133.6MM-2,453.64MM	1,003.3MM

Materials:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [.014MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm [.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

Electrical:

- Voltage rating: 30V (DC)

Unit: MM

SEC: A-A

Scale	1:1					Name	Item No. AT-C-26-8/8/B-7	
TOLERANCE					Drawn	11.18.11		Title NON-UL 26 AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Standard Plug, 50µ" of contact plating, Black
X.X	±0.40				Approved			
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
Modification		Date	Name				Drawing No.	
							Replace	
							Sheet	



rev00