
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 36626	03/09	STW

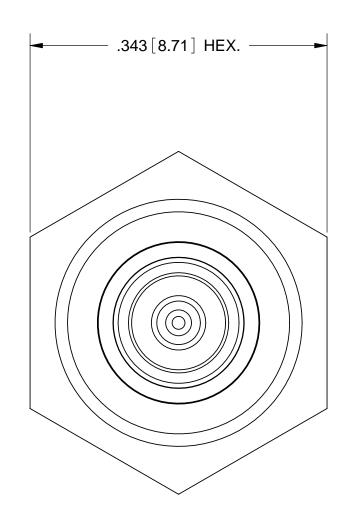

MATERIAL:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1 BODY:

CONTACT: BERYLLIUM COPPER PER ASTM B196,

ALLOY No. UNS C17300, TD04

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B INSULATOR:

SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 50/60 O-RING:

FINISH:

BODY: PASSIVATED PER AMS-2700.


CONTACT:

GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 18.0 GHz

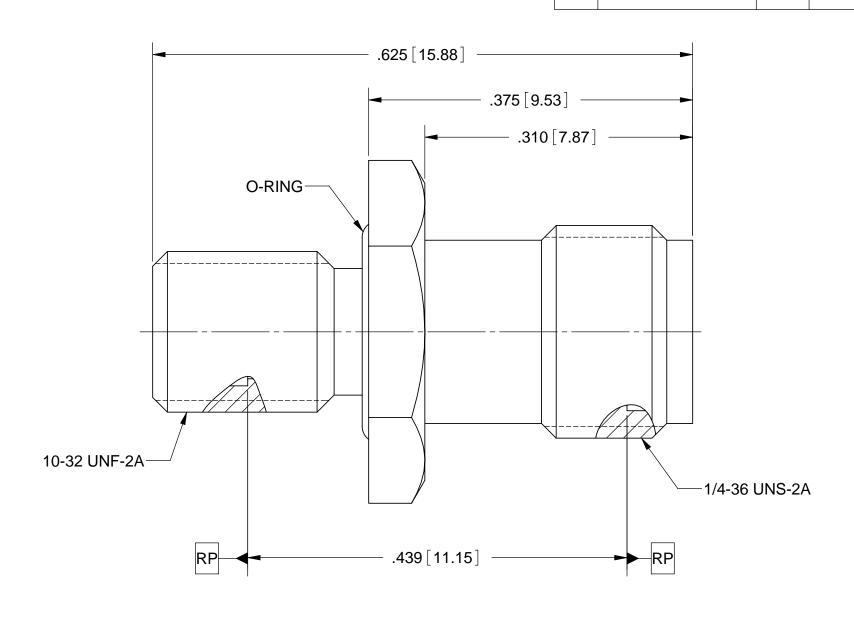

MAT	ERIAL:	SEE	NOT	ES
FINI	SH:	SEE	NOT	ES
SUR	FACE AREA	N/A	4	
	PF	ROPRIE	TARY	
IS T ANY WIT	INFORMATION HE SOLE PROI REPRODUCTI HOUT THE WR MICROWAVE, I	PERTY O ION IN PA LITTEN PI	F SV MICR ART OR AS ERMISSION	OWAVE, IN S A WHOLE N OF

DIMENSIONS ARE IN INCHES TOLERAN	NCES:
FRACTIONAL: ±1/64 ANGULAR: X°	±1°0'
DECIMAL: .X ±.030 .XX +.010	10
.XXX ±.005	
INTERPRET DIMENSIONS AND TOLERA PER ASME Y14.5M - 1994	ANCES
THIRD ANGLE PROJECTI	ON

2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROLIGHNESS 63-MIL-STD-10. 6) DIA-'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS
7) REMOVE ALL BURRS

UNLESS OTHERWISE SPECIFIED

CHECKED:

APPROVED:

SV Mi	crowave,	Inc.
2400 Centr West	epark West Drive, Su Palm Beach, FL 3340	ite 100 9
TI C.		

	SMP FULL DETENT MALE TO SMA
╛	FEMALE PANEL MOUNT ADAPTER

SF1112-6035 STW 03/31/09 B 95077 STW 03/31/09 SCALE: 9:1 SHEET 1 OF 1