

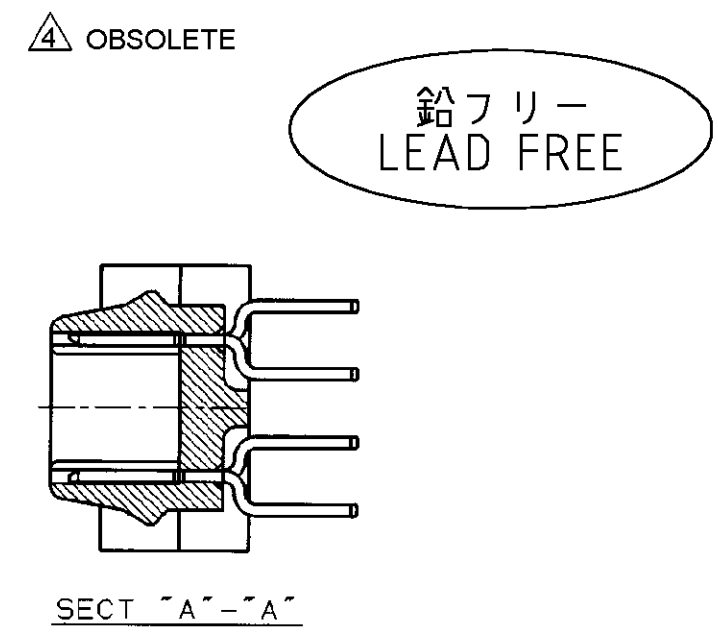
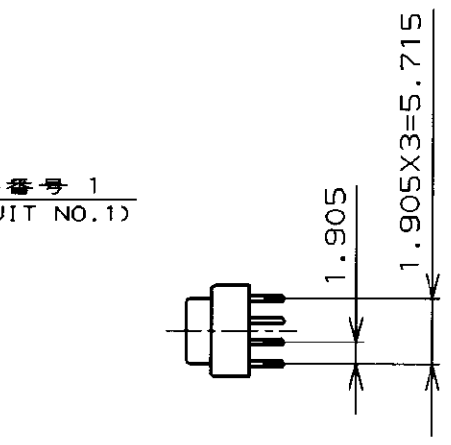


NUMBER C-5917628
METRIC
③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿

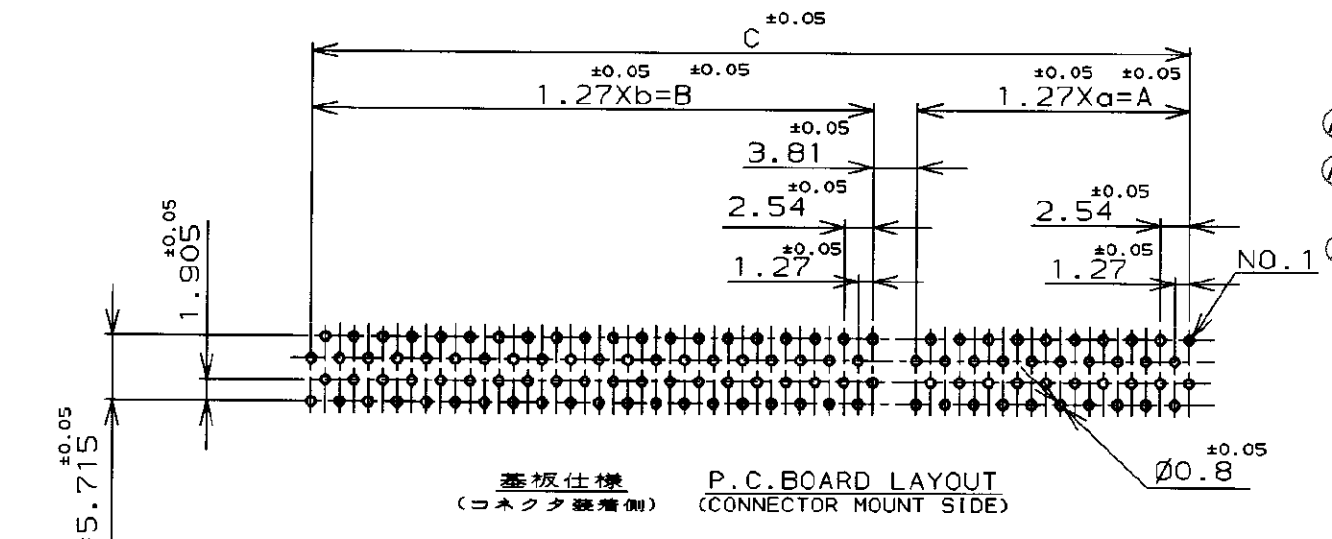

注記:
 ① 材料:ハウジング;熱可塑性樹脂 (UL 94V-0) 色:黒
 コンタクト:銅合金
 ② 表面仕上げ:
 コンタクト:全面ニッケル下地めっき
 接触部金めっき、脚部すずめっき
 3. 本製品はフラックス上がり防止処理済み

NOTE:
 ① MATERIAL:HOUSING;THERMOPLASTICS (UL 94V-0) BLACK
 CONTACT:COPPER ALLOY
 ② FINISH:CONTACT:Au AT CONTACT AREA
 TIN AT TINE, OVER Ni
 3. THESE PRODUCTS WERE COATED BY ANTI-FLUX MIGRATION AGENT.

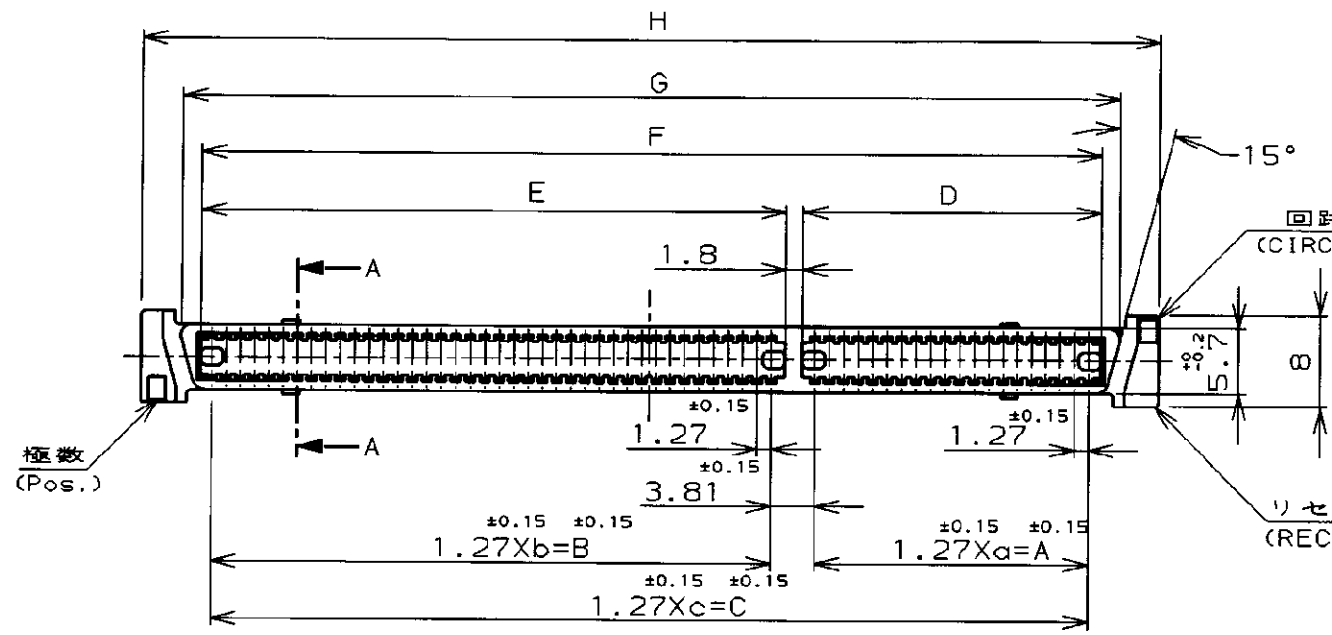

| | | | | | | | | | | | | | | | |
|---|----|-------|----|-------|----|--------|-------|-------|--------|--------|--------|-------------|------|-----|-----------|
| ④ | 29 | 36.83 | 49 | 62.23 | — | 102.87 | 38.83 | 64.23 | 104.87 | 107.86 | 115.49 | 0.76µm | 160 | 2 | ④ |
| ④ | — | — | — | — | 39 | 49.53 | — | — | 51.53 | 54.62 | 62.15 | 0.76µm | 80 | 2 | — |
| — | 39 | 49.53 | 49 | 62.23 | — | 115.57 | 51.53 | 64.23 | 117.57 | 120.66 | 128.19 | 0.3µm | 180 | — | — |
| ④ | 29 | 36.83 | 49 | 62.23 | — | 102.87 | 38.83 | 64.23 | 104.87 | 107.86 | 115.49 | 0.3µm | 160 | — | — |
| — | 29 | 36.83 | 39 | 49.53 | — | 90.17 | 38.83 | 51.53 | 92.17 | 95.26 | 102.79 | 0.3µm | 140 | — | — |
| — | 19 | 24.13 | 39 | 49.53 | — | 77.47 | 26.13 | 51.53 | 79.47 | 82.56 | 90.09 | 0.3µm | 120 | — | — |
| — | — | — | — | — | 49 | 62.23 | — | — | 64.23 | 67.32 | 74.85 | 0.3µm | 100 | — | — |
| — | — | — | — | — | 39 | 49.53 | — | — | 51.53 | 54.62 | 62.15 | 0.3µm | 80 | — | — |
| — | — | — | — | — | 29 | 36.83 | — | — | 38.83 | 41.92 | 49.45 | 0.3µm | 60 | — | — |
| — | — | — | — | — | 19 | 24.13 | — | — | 26.13 | 29.22 | 36.75 | 0.3µm | 40 | — | 5917628-1 |
| | a | A | b | B | c | C | D | E | F | G | H | THK OF GOLD | Pos. | P/N | |

PRINT DIST
 単位: ㎜ DIMENSIONS IN MM. DO NOT SCALE PRINT
 AMP-J010-2C
 REV. 3/93

| | | | | | |
|---|--|---|--|--|--|
| | | | | TE TE Connectivity | |
| A REVISED PER ECR-12-013341 28MAR2013 K.M.E.T | | O RELEASED (FJBO-0582-04) 08JUN04 T.K.I.E | | LTR DESCRIPTION DATE DWN APVD | |
| 材料 (MATERIAL) ① | | 仕上 (FINISH) ② | | 名称 (NAME) AMP FH CONNECTOR RECEPTACLE (VERTICAL) FOR 8mm STACKING | |
| I.ENOMOTO 09JUN04 | | T.KAWAMAE 09JUN04 | | I.ENOMOTO 09JUN04 | |
| CHK. I.ENOMOTO 09JUN04 | | APP. I.ENOMOTO 09JUN04 | | 一般公差 (GENERAL TOLERANCE) 10以下: ±0.2 10以上 30以下: ±0.25 30以上 100以下: ±0.3 角 度: ±3° | |
| B NTS | | J A | | C-5917628 | |
| REV. A | | SHEET 1 OF 1 | | | |

(CUSTOMER DRAWING) 参考 面